

Weldcraft™ W-180

Formerly WP-24W

Hand-Held Water-Cooled
TIG Welding Torches



QUICK SPECS

Model

W-180

Applications

Aerospace	Maintenance and repair
Manufacturing	Petro/chemical
Food/beverage industry	Precision fabrication
Shipbuilding	

Rated Output DC: 180 A, AC: 115 A

Duty Cycle 100%

Electrode Range .020–3/32 in. (0.5–2.4 mm)

W-180 TIG torch

Formerly known as the WP-24W, the W-180 is one of the smallest water-cooled TIG torches on the market. The W-180 is designed for welding in confined areas that require high amperage with the use of a water-cooled system.

Use high amperage in confined areas for efficient welding.

Superior maneuverability in limited-access locations with the compact torch body.

Excellent weld capacity without increasing torch size, due to the efficient cooling system.

Comfort and control are increased with the light, well-balanced body design.

Note: Torches delivered may vary slightly from images shown.



W-180
(WP-24W)



Miller Electric Mfg. LLC
An ITW Welding Company
1635 West Spencer Street
P.O. Box 1079
Appleton, WI 54912-1079 USA

Equipment Sales US and Canada
Phone: 866-931-9730
International Phone: 920-735-4554

MillerWelds.com



Torch Packages

MODEL		BRAIDED RUBBER	VINYL
Old Model	New Name	25 ft. (7.6 m)	25 ft. (7.6 m)
WP-24W	W-180	WP-24W-25-R	WP-24W-25

Torch packages include torch body, handle, power cable, gas hose, water hose, and collet body wrench.

Connectors

1-piece power cable connectors



195377
50 mm Dinse-style with water return line for water-cooled torch.



301883
25 mm Dinse-style flow thru gas and water return lines for water-cooled torch.



301884
50 mm Dinse-style connector that adapts machines with flow through gas valves to coolers.




225028
50 mm thread-lock-style for water-cooled torch.



45V11
Power cable adapter for water-cooled torch.

MACHINES	CONNECTION TYPE	1-PIECE POWER CABLE CONNECTORS
TIG Machines		
CST™ 280/282	50 mm Dinse-style	195377
Dynasty® 200/210/280/300/350/400	50 mm Dinse-style	195377
Dynasty® 700/800	50 mm thread-lock	225028
Maxstar® 200/210/280/350/400	50 mm Dinse-style	195377
Maxstar® 700/800	50 mm thread-lock	225028
Syncrowave® 200/210/212	50 mm Dinse-style gas thru	301884
Syncrowave® 250 DX/300/350 LX/400	50 mm Dinse-style	195377
	1/2 in. stud	45V11
Multiprocess Machines		
Dimension™ 302/452/NT 450/650/652	1/2 in. stud	45V11
Dynasty® 280 DX Multiprocess/300 Multiprocess	50 mm Dinse-style	195377
Multimatic® 220 AC/DC	25 mm Dinse-style gas thru	301883
Multimatic® 235/255	50 mm Dinse-style	195377
PipeWorx	1/2 in. stud	45V11
XMT® 304/350/400	50 mm Dinse-style	195377
XMT® 450/650	1/2 in. stud	45V11
Engine-Driven Machines		
Most Big Blue®, Trailblazer®, Bobcat™, Blue Star® and Wildcat® models	1/2 in. stud	45V11
Big Blue® 450 Duo CST	50 mm Dinse-style	195377
Other Adapter		
	Stud to Dinse-style adapter	232728

Consumables (Refer to Owner's Manual for additional replacement parts.)

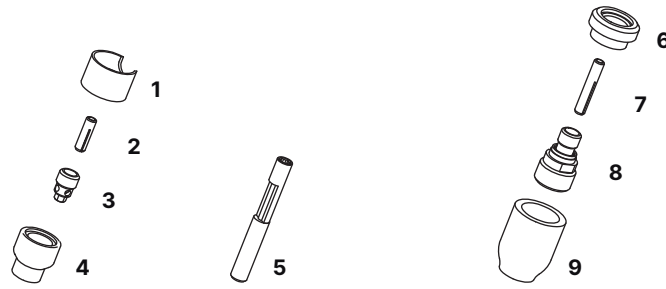

NON-GAS LENS			
Electrode Size — inch (mm)	.040 (1.0)	1/16 (1.6)	3/32 (2.4)
1 Insulator (required)	53N22	53N22	53N22
2 Collet	53N16	53N14	24C332
3 Collet Body	53N18	53N19	24CB332
Nozzle Size — size # (inch)	4 (1/4)	5 (5/16)	6 (3/8)
4 Alumina	A53N24	A53N25	A53N27
* Lava	—	53N25	—

COLLET BODY WRENCH

5 53N20

GAS LENS					
Electrode Size — inch (mm)	.040 (1.0)		1/16 (1.6)		3/32 (2.4)
6 Insulator (required)	53N66		53N66		53N66
7 Collet	53N63		53N64		24GLC332
8 Gas Lens	45V42		45V43		45V44
Nozzle Size — size # (inch)	4 (1/4)	5 (5/16)	6 (3/8)	7 (7/16)	8 (1/2)
9 Alumina Gas Lens	53N58	53N59	53N60	53N61	53N61S

*Not shown.

Tungsten

Tungsten for the most demanding TIG welding applications!

Available in four types and industry-standard diameters, our line of Weldcraft™ tungsten electrodes has undergone rigorous testing to ensure the highest quality and durability. Color-coded packages include ten 7-inch (175 mm) tungsten electrodes.

Note: Refer to manufacturer SDS sheets for proper preparation and safety. Use proper ventilation/capture during preparation. Refer to manufacturer warning regarding ventilation.



Type	Diameter in. (mm)	Part #
2% Ceriated (EWCe-2)		
Performs well in DC welding and arc starting at low-current settings, and offers excellent performance in AC processes.	0.040 (1.0)	WC040X7
	1/16 (1.6)	WC116X7
	3/32 (2.4)	WC332X7
	1/8 (3.2)	WC018X7
	5/32 (4.0)	WC532X7
2% Lanthanated (EWLa-2)		
Provides excellent arc starting, arc stability and re-ignition, and less tip erosion in AC or DC welding. Can substitute for 2% Thoriated.	0.040 (1.0)	WL2040X7
	1/16 (1.6)	WL2116X7
	3/32 (2.4)	WL2332X7
	1/8 (3.2)	WL2018X7
	5/32 (4.0)	WL2532X7
Pure (EWP)		
Forms a clean, balled end when heated and provides good arc stability for AC welding with a balanced or unbalanced squarewave or sine wave.	0.040 (1.0)	—
	1/16 (1.6)	WP116X7
	3/32 (2.4)	WP332X7
	1/8 (3.2)	WP018X7
	5/32 (4.0)	—
Rare Earth (EWG)		
Combines the best of all alloying elements, and provides excellent arc stability in AC or DC welding.	0.040 (1.0)	—
	1/16 (1.6)	WG116X7
	3/32 (2.4)	WG332X7
	1/8 (3.2)	WG018X7
	5/32 (4.0)	—

Replacement Parts

Torch Body		
W-180		WP-24W
Handles		
Ribbed		H100R
Knurled		H100
Braided Rubber Power Cables and Hoses		
	12.5 ft. (3.8 m)	25 ft. (7.6 m)
Power Cable	45V03RR	45V04RR
Water Hose*	45V07RBB	45V08RBB
Gas Hose*	45V09R	45V10R
Vinyl Power Cables and Hoses		
	12.5 ft. (3.8 m)	25 ft. (7.6 m)
Power Cable	45V03HD	45V04HD
Water Hose*	45V07HD	45V08HD
Gas Hose*	45V09	45V10

*Requires hose clamp 53N04.

Genuine Miller® Accessories

Extension Kit
EK-1-25-R 25 ft. (7.6 m), rubber



Cable Cover
WC-3-10 10 ft. (3 m)
WC-3-22 22 ft. (6.7 m)



Wireless Remote Foot Control 301580
For remote current and contactor control. Receiver plugs directly into the 14-pin

receptacle of Miller machine. 90-foot (27.4 m) operating range.



Wireless Remote Hand Control 301582

For remote current and contactor control. Receiver plugs directly into the 14-pin receptacle of Miller machine. 300-foot (91.4 m) operating range.



RCC-14 Remote Contactor and Current Control 151086

East/west rotary-motion fingertip control attaches to TIG torch using two hook-and-loop fasteners. Includes 26.5-foot (8 m) cord with 14-pin plug.



RCCS-14 Remote Contactor and Current Control 043688

North/south rotary-motion fingertip control attaches to TIG torch using two hook-and-loop fasteners. Includes 26.5-foot (8 m) cord with 14-pin plug.



Low-Conductivity TIG Coolant 043810

Must be ordered in quantities of four. One-gallon recyclable plastic bottle. Miller coolants contains

a base of ethylene glycol and deionized water to protect against freezing to -37° Fahrenheit (-38°C) or boiling to 227° Fahrenheit (108°C).

Distributed by:

